




TYPICAL OUTSIDE DIAMETER	BASIN INSIDE DIAMETER		MAXIMUM SQUARE	MAXIMUM RECTANGLES			
34"	30"	WIDTH	20"	16"	18"		
		LENGTH	20"	24"	22"		
40"	36"	WIDTH	24"	18"	20"	22"	
		LENGTH	24"	29"	27"	26"	
46"	42"	WIDTH	28"	20"	22"	24"	26"
		LENGTH	28"	35"	34"	32"	30"
52"	48"	WIDTH	32"	24"	26"	28"	30"
		LENGTH	32"	40"	38"	36"	35"
58"	54"	WIDTH	37"	28"	30"	32"	34"
		LENGTH	37"	44"	42"	40"	38"
64"	60"	WIDTH	41"	32"	34"	36"	38"
		LENGTH	41"	48"	47"	45"	43"
70"	66"	WIDTH	45"	36"	38"	40"	
		LENGTH	45"	52"	50"	48"	
76"	72"	WIDTH	49"	38"	40"	42"	
		LENGTH	49"	58"	56"	54"	
82"	78"	WIDTH	54"	40"	42"	44"	
		LENGTH	54"	64"	62"	60"	
88"	84"	WIDTH	58"	42"	44"	46"	
		LENGTH	58"	69"	68"	66"	
94"	90"	WIDTH	62"	44"	46"	48"	
		LENGTH	62"	76"	74"	72"	
100"	96"	WIDTH	66"	46"	48"		
		LENGTH	66"	80"	78"		

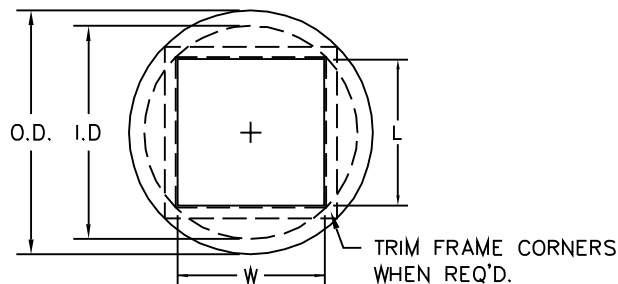

RECOMMENDED MOUNTING HOLES
 (5/8" FOR 1/2" ANCHORS)

SIZE (O.D.)	NO. HOLES
21" - 40"	4
41" - 60"	6
61" - 80"	8
81" - 100"	10