

SERIES F1R ACCESS DOOR

STANDARD FEATURES:



- 625 LBS. PER SQ. FT. LOAD RATING
(3051 KG PER SQ. METER LOAD RATING)
- FLOODTIGHT UP TO 10FT COLUMN OF WATER
- EXTRUDED ALUMINUM ANGLE FRAME
- AUTO-LOCK T-316 STAINLESS STEEL HOLD OPEN ARM WITH RELEASE HANDLE
- TYPE-316 STAINLESS STEEL HINGES AND ATTACHING HARDWARE
- STAINLESS STEEL PRESSURE LOCKS
- 1/4" (7 MM) X 1 1/2" (38 MM) EPDM/NEOPRENE GASKET
- PADLOCK LUG
- SINGLE LEAF CONSTRUCTION
- LIFETIME GUARANTEE



www.HallidayProducts.com
Phone: (800) 298-1027
Local: (407) 298-4470
Sales@HallidayProducts.com

STANDARD SIZES

QTY.	MODEL NO.	A DIM. INCHES (MM)	C DIM. INCHES (MM)	UNIT WT. LBS. (KG)
	F1R2424	24 (610)	24 (610)	46 (21)
	F1R2430	24 (610)	30 (762)	51 (23)
	F1R2436	24 (610)	36 (914)	61 (28)
	F1R2442	24 (610)	42 (1067)	77 (35)
	F1R2448	24 (610)	48 (1219)	85 (39)
	F1R3030	30 (762)	30 (762)	54 (24)
	F1R3036	30 (762)	36 (914)	69 (31)
	F1R3042	30 (762)	42 (1067)	77 (35)
	F1R3048	30 (762)	48 (1219)	85 (39)
	F1R3054	30 (762)	54 (1372)	99 (45)
	F1R3060	30 (762)	60 (1524)	106 (48)
	F1R3636	36 (914)	36 (914)	70 (32)
	F1R3642	36 (914)	42 (1067)	89 (40)
	F1R3648	36 (914)	48 (1219)	97 (44)
	F1R3654	36 (914)	54 (1372)	107 (49)
	F1R3660	36 (914)	60 (1524)	104 (47)
	F1R3666	36 (914)	66 (1676)	126 (57)
	F1R3672	36 (914)	72 (1829)	135 (61)

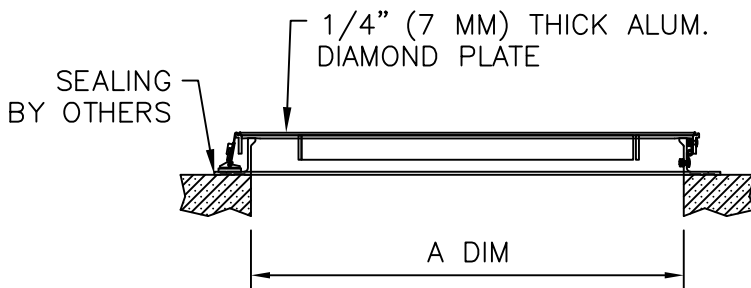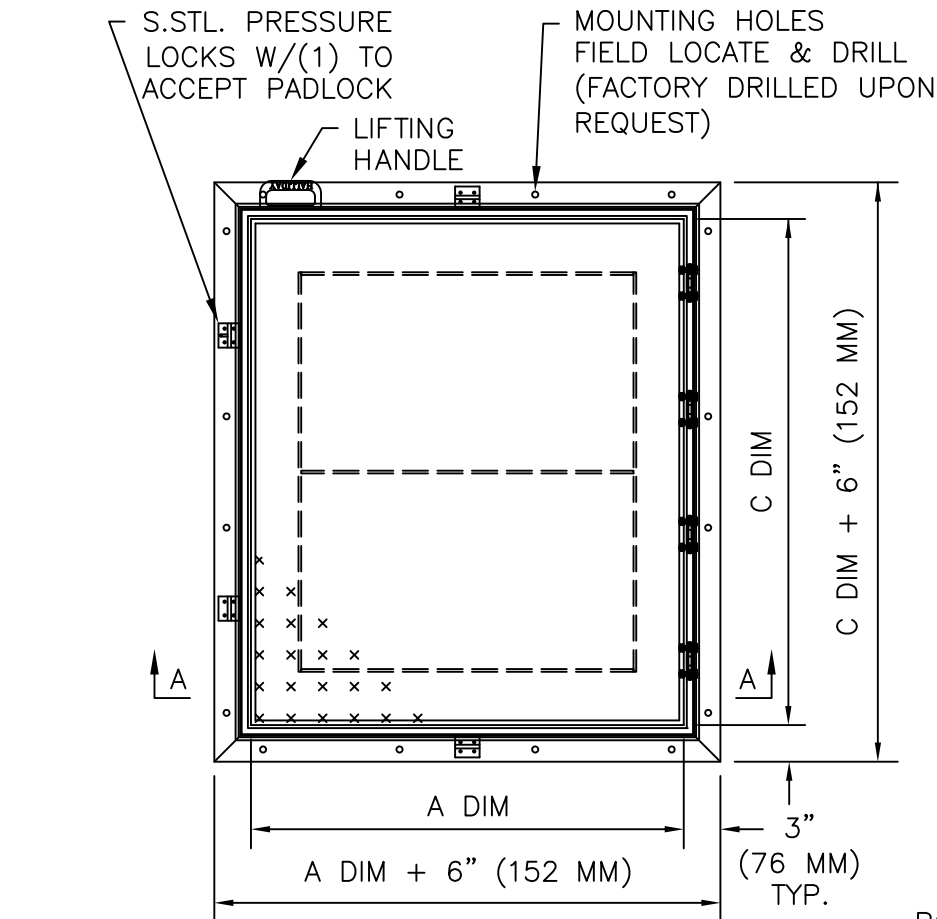

SECTION A-A

