

# SERIES F1H ACCESS DOOR

## STANDARD FEATURES:


- FLOODTIGHT/ODOR TIGHT UP TO 25FT COLUMN OF WATER (H-20 LOAD RATING)
- EXTRUDED ALUMINUM FRAME
- AUTO-LOCK T-316 STAINLESS STEEL HOLD OPEN ARM WITH RELEASE HANDLE
- TYPE-316 STAINLESS STEEL HINGES AND ATTACHING HARDWARE
- EPDM GASKET/CUSHION (ON COVER)
- CAM LOCKS
- STAINLESS STEEL COMPRESSION SPRING ASSIST
- RECESSED LIFTING HANDLE
- LIFETIME GUARANTEE



www.HallidayProducts.com  
 Phone: (800) 298-1027  
 Local: (407) 298-4470  
 Sales@HallidayProducts.com

## STANDARD SIZES

| QTY. | MODEL NO. | A DIM<br>INCHES<br>(MM) | C DIM<br>INCHES<br>(MM) | UNIT WT.<br>LBS.<br>(KG) |
|------|-----------|-------------------------|-------------------------|--------------------------|
|      | F1H2424   | 24 (610)                | 24 (610)                | 95 (43)                  |
|      | F1H2430   | 24 (610)                | 30 (762)                | 108 (49)                 |
|      | F1H2436   | 24 (610)                | 36 (914)                | 120 (54)                 |
|      | F1H2442   | 24 (610)                | 42 (1067)               | 141 (64)                 |
|      | F1H2448   | 24 (610)                | 48 (1219)               | 158 (72)                 |
|      | F1H3030   | 30 (762)                | 30 (762)                | 120 (54)                 |
|      | F1H3036   | 30 (762)                | 36 (914)                | 134 (61)                 |
|      | F1H3042   | 30 (762)                | 42 (1067)               | 156 (71)                 |
|      | F1H3048   | 30 (762)                | 48 (1219)               | 172 (78)                 |
|      | F1H3054   | 30 (762)                | 54 (1372)               | 187 (85)                 |
|      | F1H3060   | 30 (762)                | 60 (1524)               | 201 (91)                 |
|      | F1H3072   | 30 (762)                | 72 (1829)               | 232 (105)                |
|      | F1H3636   | 36 (914)                | 36 (914)                | 149 (68)                 |
|      | F1H3642   | 36 (914)                | 42 (1067)               | 175 (79)                 |
|      | F1H3648   | 36 (914)                | 48 (1219)               | 194 (88)                 |
|      | F1H3654   | 36 (914)                | 54 (1372)               | 209 (95)                 |
|      | F1H3660   | 36 (914)                | 60 (1524)               | 225 (102)                |
|      | F1H3672   | 36 (914)                | 72 (1829)               | 256 (116)                |

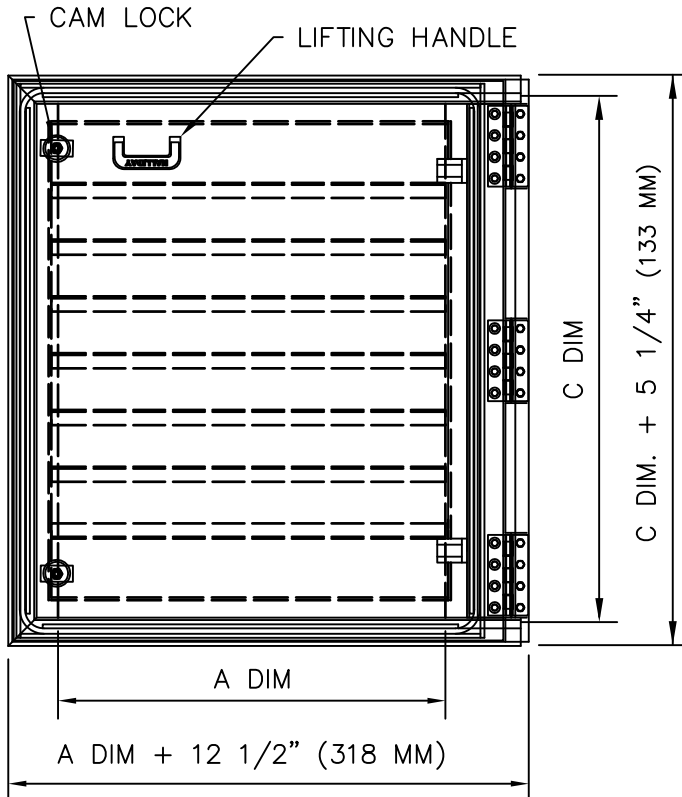

## NOTES:

- 1) SUITABLE FOR USE IN OFF STREET LOCATION WHERE NOT SUBJECTED TO TRAFFIC
- 2) PROVIDE A FULL BED OF CLASS "A" CONCRETE UNDER FRAME AND SUPPORT ANGLES.
- 3) MINIMAL LEAKAGE MAY OCCUR UNDER NORMAL OPERATION AS THIS PRODUCT IS NOT GUARANTEED TO BE 100% WATERTIGHT. NOT RECOMMENDED FOR INSTALLATION OVER ELECTRICAL COMPONENTS.

