
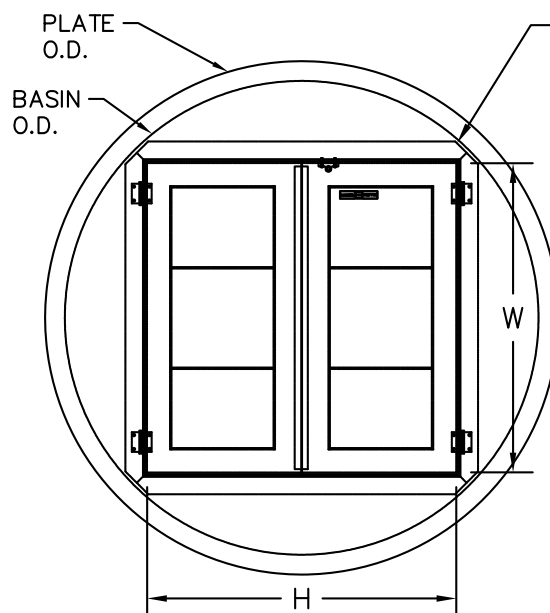


BASIN INSIDE DIAMETER	OPENING SIZE BY	MAXIMUM SQUARE	MAXIMUM RECTANGLES			
30"	HEIGHT	20"	16"	18"		
	WIDTH	20"	24"	22"		
36"	HEIGHT	24"	18"	20"	22"	
	WIDTH	24"	29"	27"	26"	
42"	HEIGHT	28"	20"	22"	24"	26"
	WIDTH	28"	35"	34"	32"	30"
48"	HEIGHT	32"	24"	26"	28"	30"
	WIDTH	32"	40"	38"	36"	35"
54"	HEIGHT	37"	28"	30"	32"	34"
	WIDTH	37"	44"	42"	40"	38"
60"	HEIGHT	41"	32"	34"	36"	38"
	WIDTH	41"	48"	47"	45"	43"
66"	HEIGHT	45"	36"	38"	40"	
	WIDTH	45"	52"	50"	48"	
72"	HEIGHT	49"	38"	40"	42"	
	WIDTH	49"	58"	56"	54"	
78"	HEIGHT	54"	40"	42"	44"	
	WIDTH	54"	64"	62"	60"	
84"	HEIGHT	58"	42"	44"	46"	
	WIDTH	58"	69"	68"	66"	
90"	HEIGHT	62"	44"	46"	48"	
	WIDTH	62"	76"	74"	72"	
96"	HEIGHT	66"	46"	48"		
	WIDTH	66"	80"	78"		

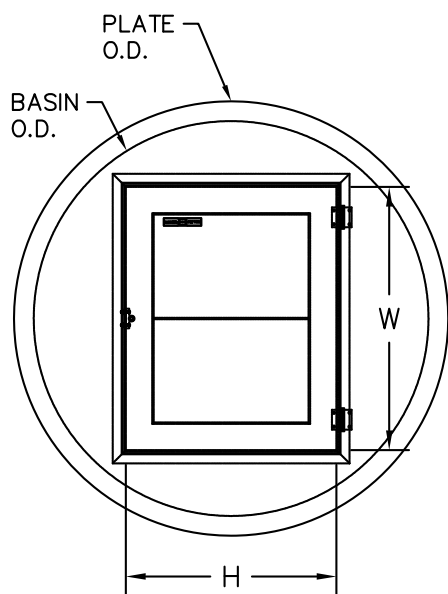

FRAME CORNERS TRIMMED
WHEN REQUIRED

RECOMMENDED PLATE O.D.
 MOUNTING ON FIBERGLASS BASIN
 = BASIN I.D. + 4"
 MOUNTING ON A CONCRETE BASIN
 = BASIN I.D. + 6"

RECOMMENDED MOUNTING HOLES
 (5/8" FOR 1/2" ANCHORS)

PLATE O.D.	QUANTITY OF HOLES
34" - 40"	4
41" - 60"	6
61" - 80"	8
81" - 102"	10