

# **SERIES W1R & W2R ACCESS COVERS**

## **TABLE OF CONTENTS**

**V e n d o r   D a t a**

**M a t e r i a l   D a t a   S h e e t**

**S p e c i f i c a t i o n**

**C o m p o n e n t   P a r t s   L i s t**

**Storage, Handling, Installation & Maintenance Instructions**

**Limited Warranty**

**VENDOR DATA**

**HALLIDAY PRODUCTS, INC.**

**6401 Edgewater Drive**

**Orlando, FL 32810**

**Phone: 407-298-4470 - Fax: 407-298-4534**

**Toll Free: 800-298-1027**

**Email: [Sales@HallidayProducts.com](mailto:Sales@HallidayProducts.com)**

**Web Site at [www.HallidayProducts.com](http://www.HallidayProducts.com)**

## **MATERIAL DATA SHEET**

### Access Frames and Covers

1. Door leaf shall be ¼-in. thick 5086-H34\* mill finish aluminum diamond pattern plate, reinforced with a ¼-in. aluminum flat bar to attain 300 lb/ft<sup>2</sup> (1462 kg/m<sup>2</sup>) live load.
2. Frame members shall be ¼-in. thick 6005-T5 mill finish aluminum extrusion.
3. The following items shall be Type 316 stainless steel: hinges, hold-open arm and all attaching hardware.
4. Units shall carry a Lifetime Guarantee against defects in material and/or workmanship.

\*5086-H34 has excellent resistance to corrosion--especially in a marine environment, good workability, weld ability, good finishing characteristics, and higher strength than 3003 or 5052.

## **Series W1R and W2R Access Covers**

### **STANDARD FEATURES:**


Auto-lock, T316 stainless steel hold-open arm with release handle  
T-316 stainless steel hinges and attaching hardware  
Non-corrosive locking bar and handle  
Channel frame  
Single or double leaf construction  
300 lb/ft<sup>2</sup> (1462 kg/m<sup>2</sup>) live load  
Lifetime guarantee

### **SPECIFICATION:**

The W1R (single leaf) and W2R (double leaf) access frames and covers as manufactured by Halliday Products, Inc. of Orlando, Florida shall have a ¼-in. thick one-piece, mill finish, extruded aluminum channel frame, incorporating a continuous concrete anchor. A 1-½-in. drainage coupling shall be located in the front left corner of the channel frame. Door panel(s) shall be ¼-in. aluminum diamond plate, reinforced to withstand a 300 lb/ft<sup>2</sup> (1462 kg/m<sup>2</sup>) live load. Door(s) shall open to 90 degrees and automatically lock with T-316 stainless steel hold-open arm(s) with aluminum release handle(s). Door(s) shall close flush with the frame. Hinges and all fastening hardware shall be T-316 stainless steel. Unit shall lock with a non-corrosive locking bar and have a non-corrosive handle. Unit shall carry a Lifetime guarantee against defects in material and/or workmanship.




## SERIES W1R ACCESS COVER

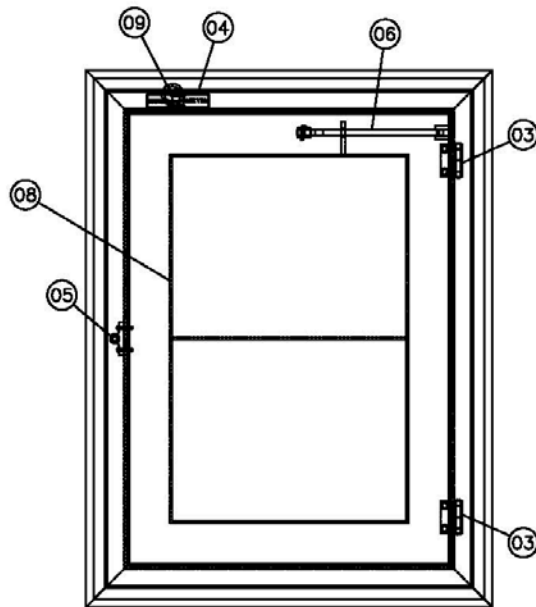

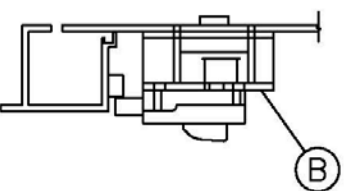
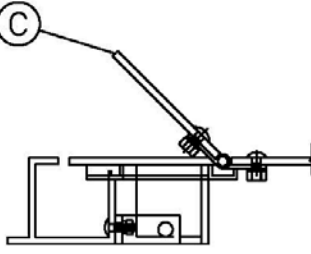
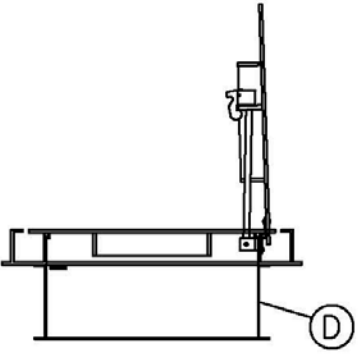
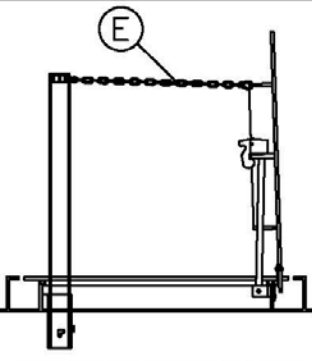
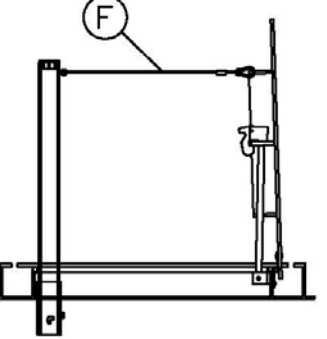

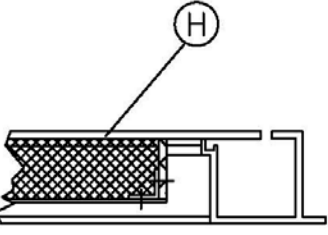
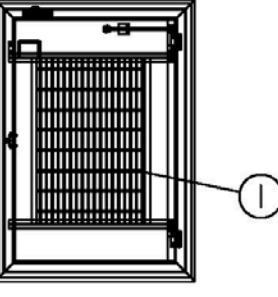


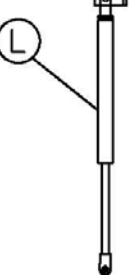


### STANDARD COMPONENT PARTS

- ① FRAME EXTRUSION
- ② DIAMOND PLATE COVER
- ③ HINGES W/ HARDWARE
- ④ LIFTING HANDLE
- ⑤ PADLOCK BAR
- ⑥ HOLD-OPEN ARM
- ⑦ POSITIVE LOCKING LATCH
- ⑧ COVER REINFORCEMENT
- ⑨ DRAIN COUPLING

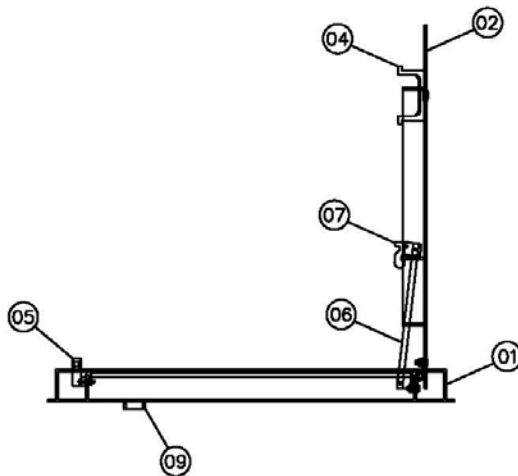


W1R PARTS LIST - R0

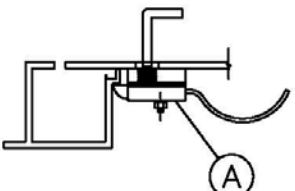	<div data-bbox="932 176 1130 270"></div> <div data-bbox="896 287 1169 317"><p><b>SERIES W1R - OPTIONS</b></p></div> <div data-bbox="753 329 1427 648"><table><tr><td>(A) SLAM LOCK</td><td>(G) NUT RAIL</td></tr><tr><td>(B) KEYED CYLINDER LOCK</td><td>(H) INSULATION W/ CAPTIVE PAN</td></tr><tr><td>(C) RECESSED LOCK BOX</td><td>(I) PROTECTIVE GRATING</td></tr><tr><td>(D) SLAB SKIRTING</td><td>(J) GASKET</td></tr><tr><td>(E) SAFETY POST &amp; CHAIN</td><td>(K) SIDE DRAIN</td></tr><tr><td>(F) SAFETY POST &amp; CABLE</td><td>(L) SPRING ASSIST</td></tr></table></div>			(A) SLAM LOCK	(G) NUT RAIL	(B) KEYED CYLINDER LOCK	(H) INSULATION W/ CAPTIVE PAN	(C) RECESSED LOCK BOX	(I) PROTECTIVE GRATING	(D) SLAB SKIRTING	(J) GASKET	(E) SAFETY POST & CHAIN	(K) SIDE DRAIN	(F) SAFETY POST & CABLE	(L) SPRING ASSIST
(A) SLAM LOCK	(G) NUT RAIL														
(B) KEYED CYLINDER LOCK	(H) INSULATION W/ CAPTIVE PAN														
(C) RECESSED LOCK BOX	(I) PROTECTIVE GRATING														
(D) SLAB SKIRTING	(J) GASKET														
(E) SAFETY POST & CHAIN	(K) SIDE DRAIN														
(F) SAFETY POST & CABLE	(L) SPRING ASSIST														
															
		 <p><b>N/A W/ GRATING PANEL</b></p>													
 <p><b>N/A W/ GRATING PANEL</b></p>															
			 <p><b>W1R OPTIONS LIST - R0</b></p>												




## SERIES W2R ACCESS COVER



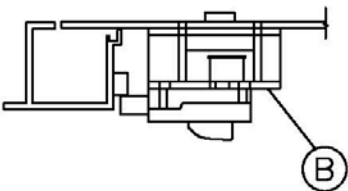
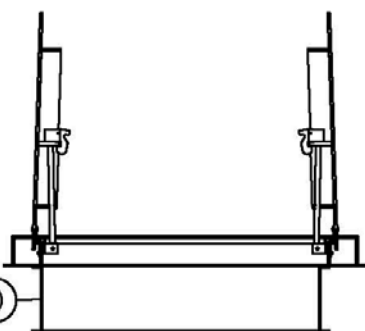
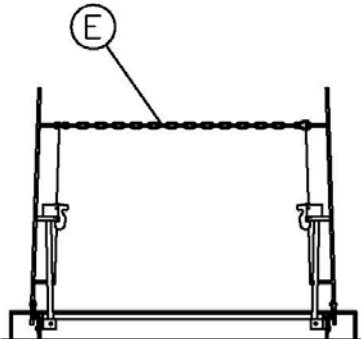
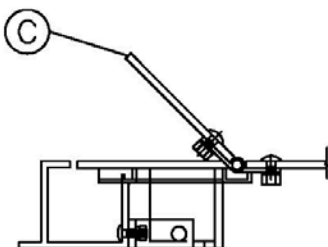
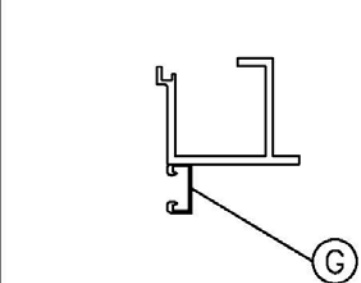
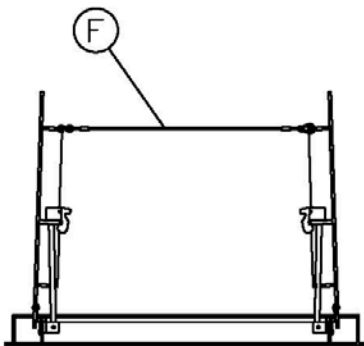

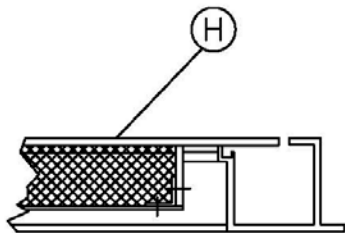
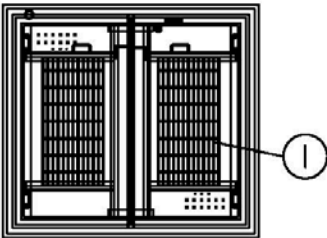


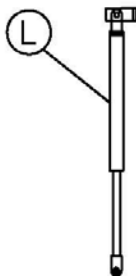
### STANDARD COMPONENT PARTS

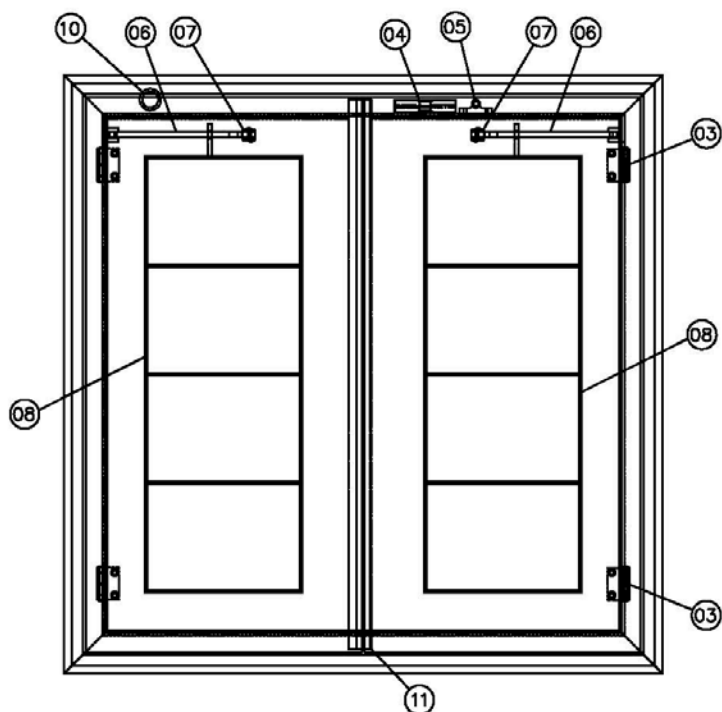

- ① FRAME EXTRUSION
- ② DIAMOND PLATE COVER
- ③ HINGES W/ HARDWARE
- ④ LIFTING HANDLE
- ⑤ PADLOCK BAR
- ⑥ HOLD-OPEN ARM
- ⑦ POSITIVE LOCKING LATCH
- ⑧ COVER REINFORCEMENT
- ⑨ GASKET
- ⑩ DRAIN COUPLING
- ⑪ ASTRAGAL

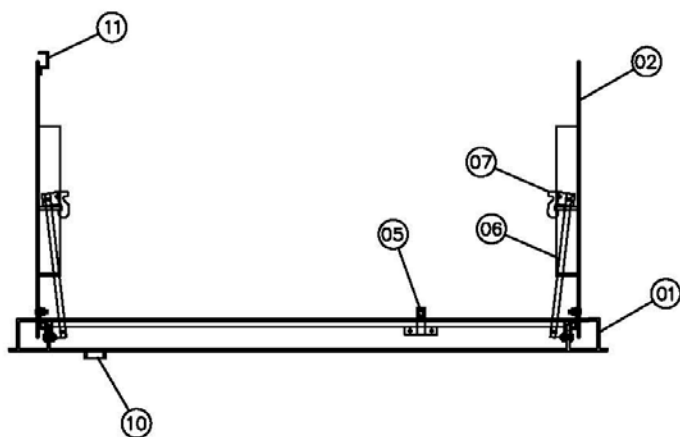

W2R PARTS LIST - R0

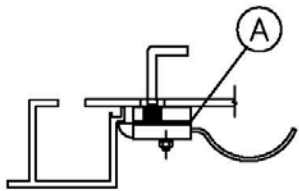	<div data-bbox="937 111 1136 210"></div> <div data-bbox="893 224 1179 256"><p><b>SERIES W2R - OPTIONS</b></p></div> <div data-bbox="755 266 1437 594"><table><tr><td>(A) SLAM LOCK</td><td>(G) NUT RAIL</td></tr><tr><td>(B) KEYED CYLINDER LOCK</td><td>(H) INSULATION W/ CAPTIVE PAN</td></tr><tr><td>(C) RECESSED LOCK BOX</td><td>(I) PROTECTIVE GRATING</td></tr><tr><td>(D) SLAB SKIRTING</td><td>(J) GASKET</td></tr><tr><td>(E) SAFETY CHAIN</td><td>(K) SIDE DRAIN</td></tr><tr><td>(F) SAFETY CABLE</td><td>(L) SPRING ASSIST</td></tr></table></div>			(A) SLAM LOCK	(G) NUT RAIL	(B) KEYED CYLINDER LOCK	(H) INSULATION W/ CAPTIVE PAN	(C) RECESSED LOCK BOX	(I) PROTECTIVE GRATING	(D) SLAB SKIRTING	(J) GASKET	(E) SAFETY CHAIN	(K) SIDE DRAIN	(F) SAFETY CABLE	(L) SPRING ASSIST
(A) SLAM LOCK	(G) NUT RAIL														
(B) KEYED CYLINDER LOCK	(H) INSULATION W/ CAPTIVE PAN														
(C) RECESSED LOCK BOX	(I) PROTECTIVE GRATING														
(D) SLAB SKIRTING	(J) GASKET														
(E) SAFETY CHAIN	(K) SIDE DRAIN														
(F) SAFETY CABLE	(L) SPRING ASSIST														
															
															
															
															
<div data-bbox="1222 1820 1433 1837"><p>W2R OPTIONS LIST - R0</p></div>															



## **STORAGE, HANDLING, INSTALLATION and MAINTENANCE**

### **STORAGE:**

Prior to installation, access covers should be stored in a dry area on the original shipping pallets.

### **HANDLING:**

Standard practice precautions should be taken whenever handling or moving palletized access covers by forklift.

### **INSTALLATION:**

For proper installation, Halliday Products, Inc. recommends the following:

1. Formwork must be flush to the inside of frame.
2. Secure unit to formwork using standard construction practices.
3. When pouring concrete, cover should be in the closed position.
4. Concrete to finish flush with top of unit framework.
5. Unit should be left in formwork for not less than 24 hours.
6. Clean all excess concrete from frame, over seat; and in the case of a channel frame model, the drainage coupling.

### **MAINTENANCE:**

Because access covers manufactured by Halliday Products, Inc. are of all aluminum and stainless steel construction, they require minimal maintenance. For optimum product life the manufacturer recommends the following procedures be performed annually:

1. Apply graphite to the interior of all locking devices.
2. Apply a light coating of machine oil to all hinges and hardware.
3. Remove all debris from the cover seat and around hinges.
4. Check and tighten any loose hardware.
5. In the case of a channel frame model, remove loose debris from channel.



## LIMITED WARRANTY

Halliday Products, Inc., a Florida Corporation ("Company") warrants to the original customer the aluminum access frame and cover will be free from defective material or faulty workmanship for the life of the unit. In the event of malfunction or other indication of failure attributable directly to defective material or faulty workmanship, Company will, upon receipt of a written notification from customer of such defective material or faulty workmanship, at its option and expense, repair or replace the defective frame and cover, or a component thereof, to whatever extent Company shall deem necessary to restore the frame and cover, or a component thereof, to proper operating condition. Company may replace the defective frame and cover, or a component thereof, with either a new or remanufactured, functionally equivalent frame and cover or component thereof at the Company's option. **THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER OR NOT STATUTORY, OR EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE EXCLUSIVE REMEDY FOR DEFECTIVE FRAME AND COVER SHALL BE ONLY IN CONTRACT, WHETHER OR NOT CAUSED BY A DEFECTIVE FRAME AND COVER, OR NEGLIGENCE. COMPANY'S LIABILITY FOR LOSS OR DAMAGES SHALL NOT EXCEED THE PRICE PAID BY CUSTOMER FOR THE FRAME AND COVER, REGARDLESS OF THE FORM OF ANY CLAIM. IN NO EVENT SHALL COMPANY BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, CONSEQUENTIAL, OR PUNITIVE DAMAGES WHATSOEVER RESULTING FROM ANY DEFECTIVE FRAME AND COVER OR COMPONENT THEREOF. IF MODIFICATION OR ALTERATION IS MADE TO THE FRAME AND COVER OR COMPONENT THEREOF BY OTHER THAN COMPANY AUTHORIZED PERSONS, OR IF IT IS INSTALLED IMPROPERLY, OR MISUSED, ABUSED AND/OR NEGLECTED, THIS LIMITED WARRANTY IS NULL AND VOID AND OF NO EFFECT. THIS LIMITED WARRANTY DOES NOT APPLY AND THE COMPANY WILL HAVE NO RESPONSIBILITY HEREUNDER FOR NORMAL WEAR AND TEAR.**

Halliday Products, Inc.  
6401 Edgewater Dr  
Orlando, FL 32810  
Toll Free: 800-298-1027  
Fax: 407-298-4534