


SERIES F1C ACCESS DOOR

STANDARD FEATURES:

- 1/4 ALUMINUM TREAD PLATE COVER
- 1/4 THICK ALUMINUM FRAME EXTRUSION
- T-316 STAINLESS STEEL HARDWARE
- EPDM GASKET/CUSHION (ON COVER)
- STAINLESS STEEL HOLD OPEN ARM
- CAM LOCKS
- SPRING ASSIST
- LIFETIME GUARANTEE
- FLOODTIGHT/ODORTIGHT – UP TO 25 FT. COLUMN OF WATER (1560 PSF)

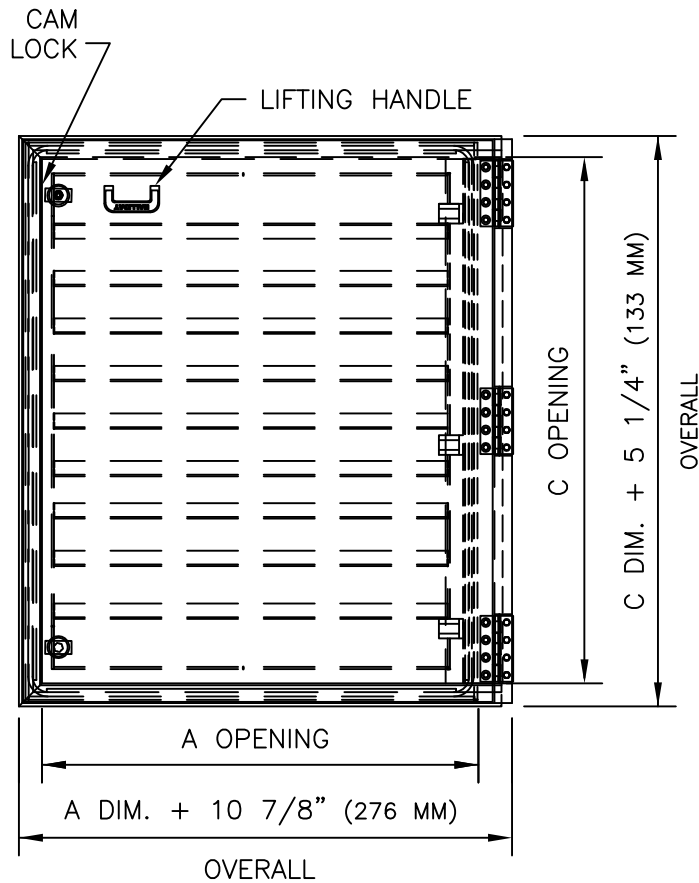

STANDARD SIZES				
QTY.	MODEL NO.	A DIM. INCHES (MM)	C DIM. INCHES (MM)	UNIT WT. LBS. (KG.)
	F1C2424	24 (610)	24 (610)	82 (37)
	F1C2430	24 (610)	30 (762)	94 (43)
	F1C2436	24 (610)	36 (914)	106 (48)
	F1C2442	24 (610)	42 (1067)	119 (54)
	F1C2448	24 (610)	48 (1219)	135 (61)
	F1C3030	30 (762)	30 (762)	105 (48)
	F1C3036	30 (762)	36 (914)	118 (54)
	F1C3042	30 (762)	42 (1067)	131 (59)
	F1C3048	30 (762)	48 (1219)	147 (67)
	F1C3054	30 (762)	54 (1372)	161 (73)
	F1C3060	30 (762)	60 (1524)	174 (79)
	F1C3072	30 (762)	72 (1829)	212 (96)
	F1C3636	36 (914)	36 (914)	130 (59)
	F1C3642	36 (914)	42 (1067)	148 (67)
	F1C3648	36 (914)	48 (1219)	166 (75)
	F1C3654	36 (914)	54 (1372)	181 (82)
	F1C3660	36 (914)	60 (1524)	196 (89)
	F1C3672	36 (914)	72 (1829)	233 (106)

NOTES:

- 1) PROVIDE A FULL BED OF CLASS "A" CONCRETE UNDER FRAME AND SUPPORT ANGLES.
- 2) MINIMAL LEAKAGE MAY OCCUR UNDER NORMAL OPERATION AS THIS PRODUCT IS NOT GUARANTEED TO BE 100% WATERTIGHT. NOT RECOMMENDED FOR INSTALLATION OVER ELECTRICAL COMPONENTS.

