


SERIES H1R ACCESS DOOR



www.HallidayProducts.com
 Phone: (800) 298-1027
 Local: (407) 298-4470
 Sales@HallidayProducts.com

STANDARD FEATURES:

- H20 LOAD RATING (SEE NOTES)
- EXTRUDED ALUMINUM ANGLE FRAME
- SINGLE LEAF CONSTRUCTION
- AUTO-LOCK T-316 STAINLESS STEEL HOLD OPEN ARM WITH RELEASE HANDLE
- T-316 STAINLESS STEEL HINGES AND ATTACHING HARDWARE
- T-316 STAINLESS STEEL SLAM LOCK WITH REMOVABLE KEY
- STAINLESS STEEL COMPRESSION SPRING ASSIST
- RECESSED LIFTING HANDLE
- LIFETIME GUARANTEE

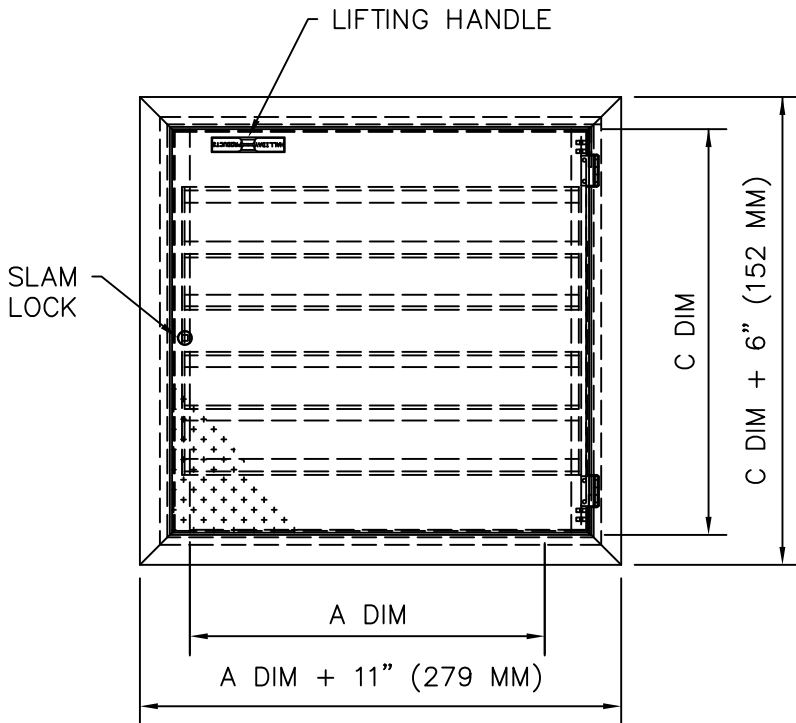

| STANDARD SIZES | | | | |
|----------------|-----------|--------------------|--------------------|--------------------|
| QTY. | MODEL NO. | A DIM. INCHES (MM) | C DIM. INCHES (MM) | UNIT WT. LBS. (KG) |
| | H1R2424 | 24 (610) | 24 (610) | 60 (27) |
| | H1R2430 | 24 (610) | 30 (762) | 75 (34) |
| | H1R2436 | 24 (610) | 36 (914) | 90 (41) |
| | H1R2442 | 24 (610) | 42 (1067) | 105 (48) |
| | H1R3030 | 30 (762) | 30 (762) | 94 (43) |
| | H1R3036 | 30 (762) | 36 (914) | 113 (51) |
| | H1R3042 | 30 (762) | 42 (1067) | 131 (59) |
| | H1R3048 | 30 (762) | 48 (1219) | 150 (68) |
| | H1R3636 | 36 (914) | 36 (914) | 135 (61) |
| | H1R3642 | 36 (914) | 42 (1067) | 158 (72) |
| | H1R3648 | 36 (914) | 48 (1219) | 180 (82) |
| | | | | |
| | | | | |

NOTES:

- 1) SUITABLE FOR USE IN OFF STREET LOCATION WHERE NOT SUBJECTED TO HIGH DENSITY TRAFFIC.
- 2) PROVIDE A FULL BED OF CLASS "A" CONCRETE UNDER FRAME AND SUPPORT ANGLES.

